



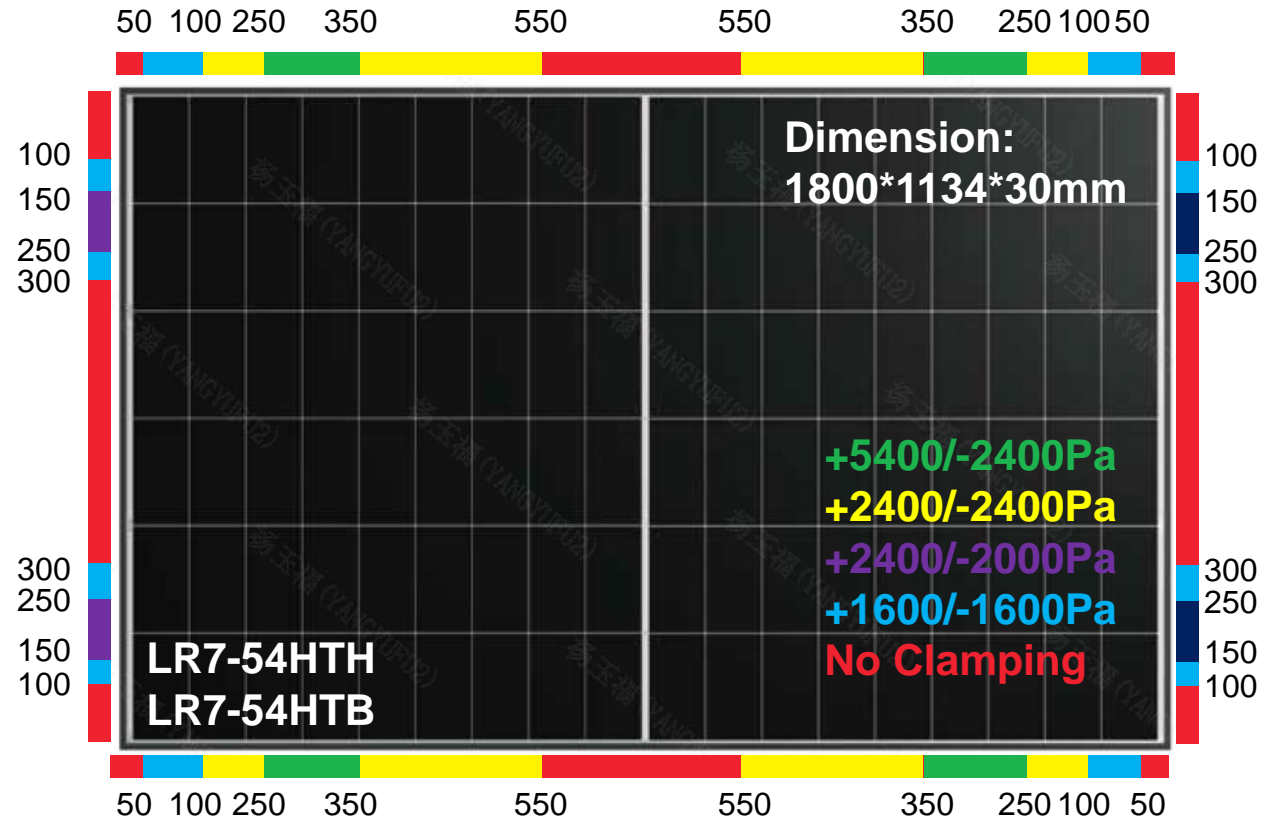

Hi-MO X6 Max

LR7-54HTH

LR7-54HTB


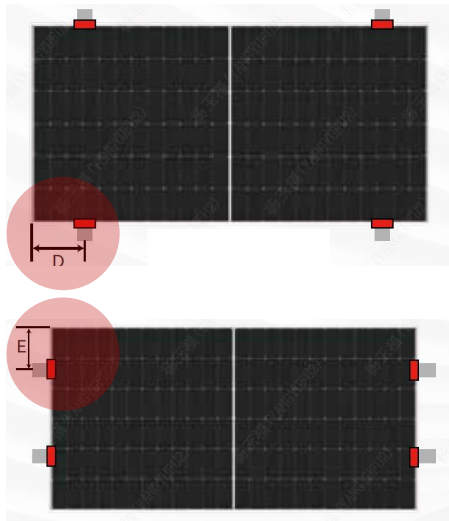


Note:

- "S" is the width of the clamp and it shall be no less than **40** mm
- Figures indicate the distance between the center of clamp to the end of frame
- Please feel free to contact us if
 - Clamp width is less than **40** mm
 - Your installation requires special clamping zone, or more rails
 - Other special installation method is needed

LR7-60HTH

LR7-60HTB

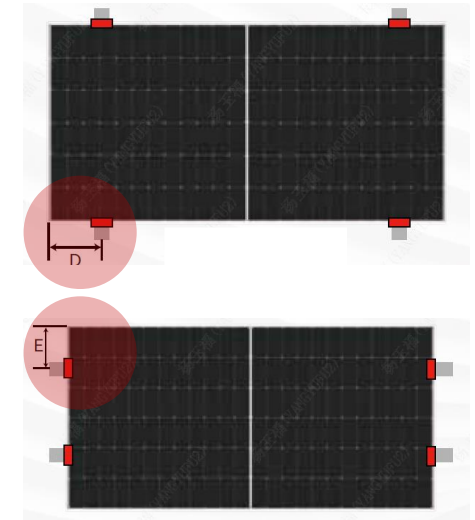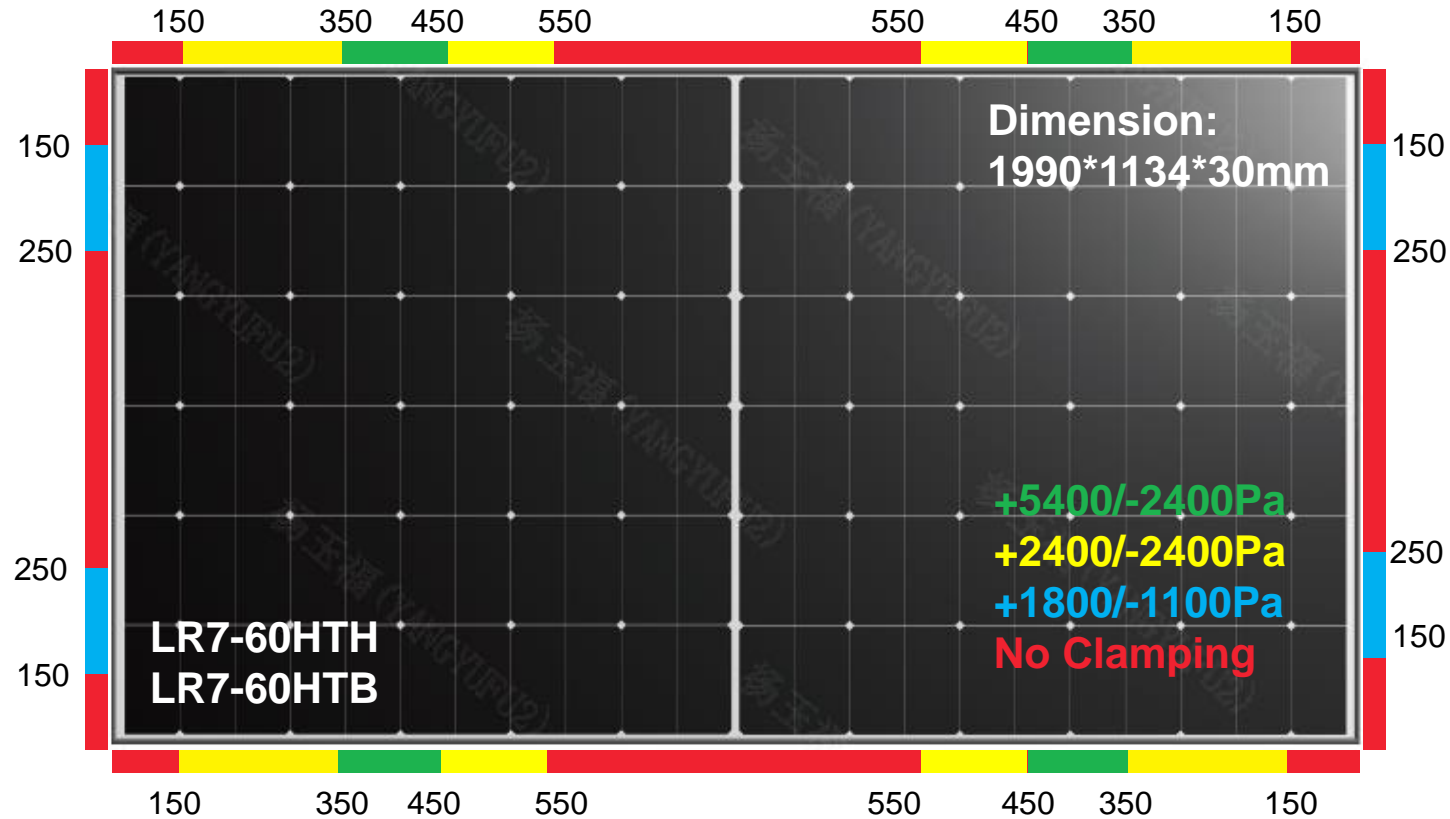

Note:

- "S" is the width of the clamp and it shall be no less than **40** mm
- Figures indicate the distance between the center of clamp to the end of frame
- Please feel free to contact us if



Clamp width is less than **40** mm

Your installation requires special clamping zone, or more rails

Other special installation method is needed

LR7-72HTH

LR7-72HTHF

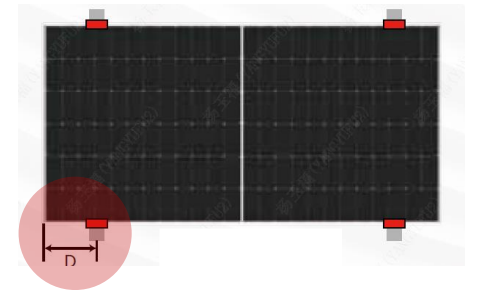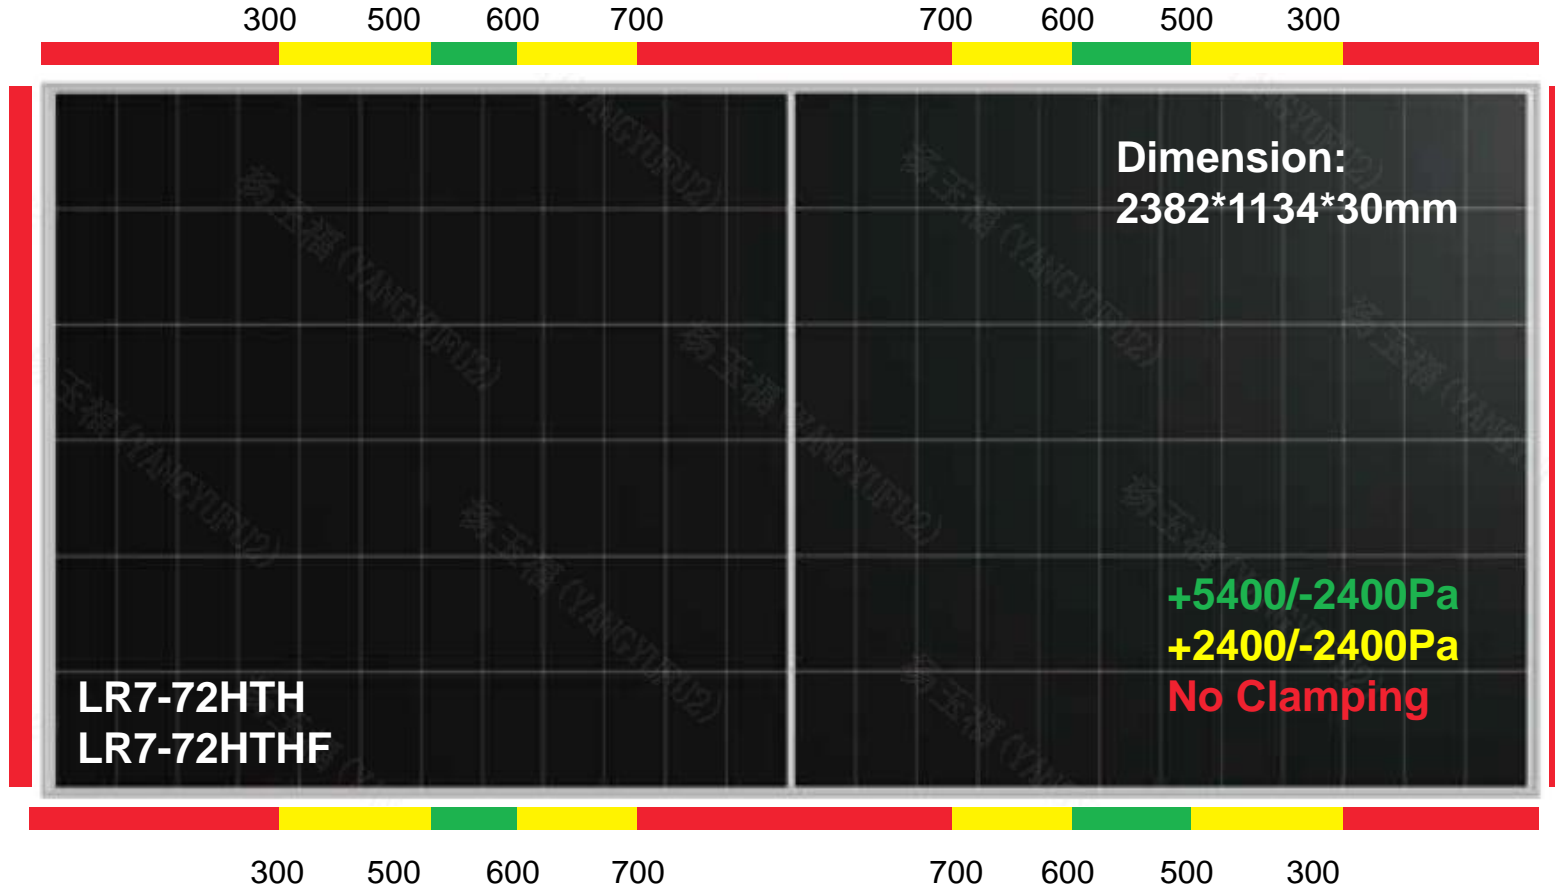


Note:

- "S" is the width of the clamp and it shall be no less than **40** mm
- Figures indicate the distance between the center of clamp to the end of frame
- Please feel free to contact us if
 - Clamp width is less than **40** mm
 - Your installation requires special clamping zone, or more rails
 - Other special installation method is needed




Hi-MO X6

Hi-MO 5

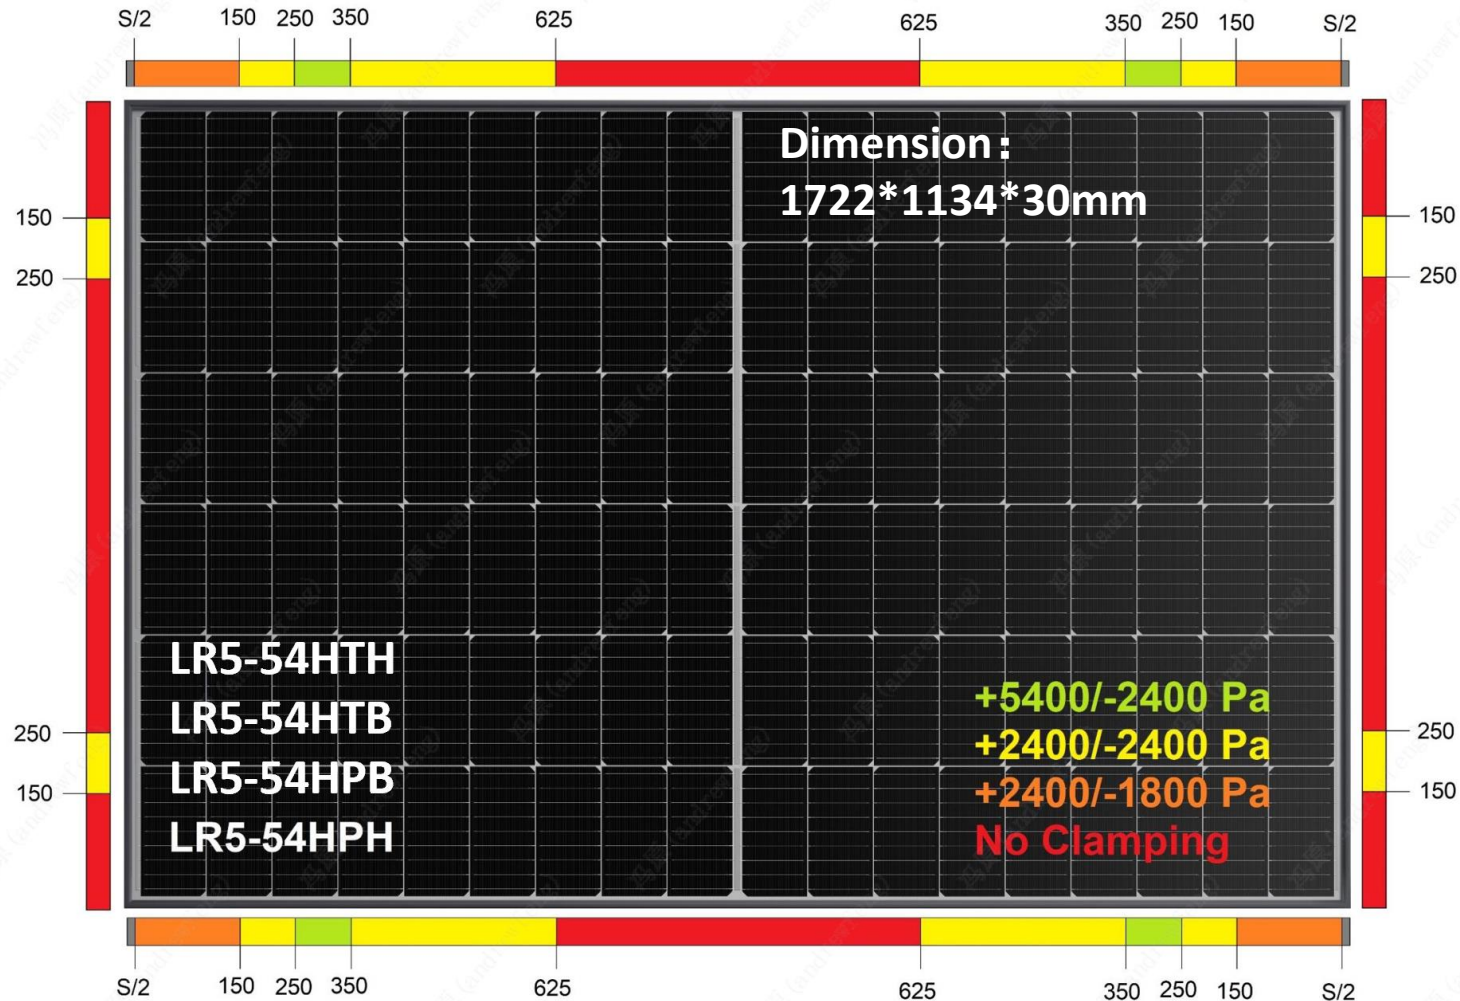


Note:

- “S” is the width of the clamp and it shall be no less than 40mm
- Figures indicate the distance between the center of clamp to the end of frame
- Please feel free to contact us if
 - Clamp width is less than 40mm
 - Your installation requires special clamping zone, or more rails
 - Other special installation method is needed

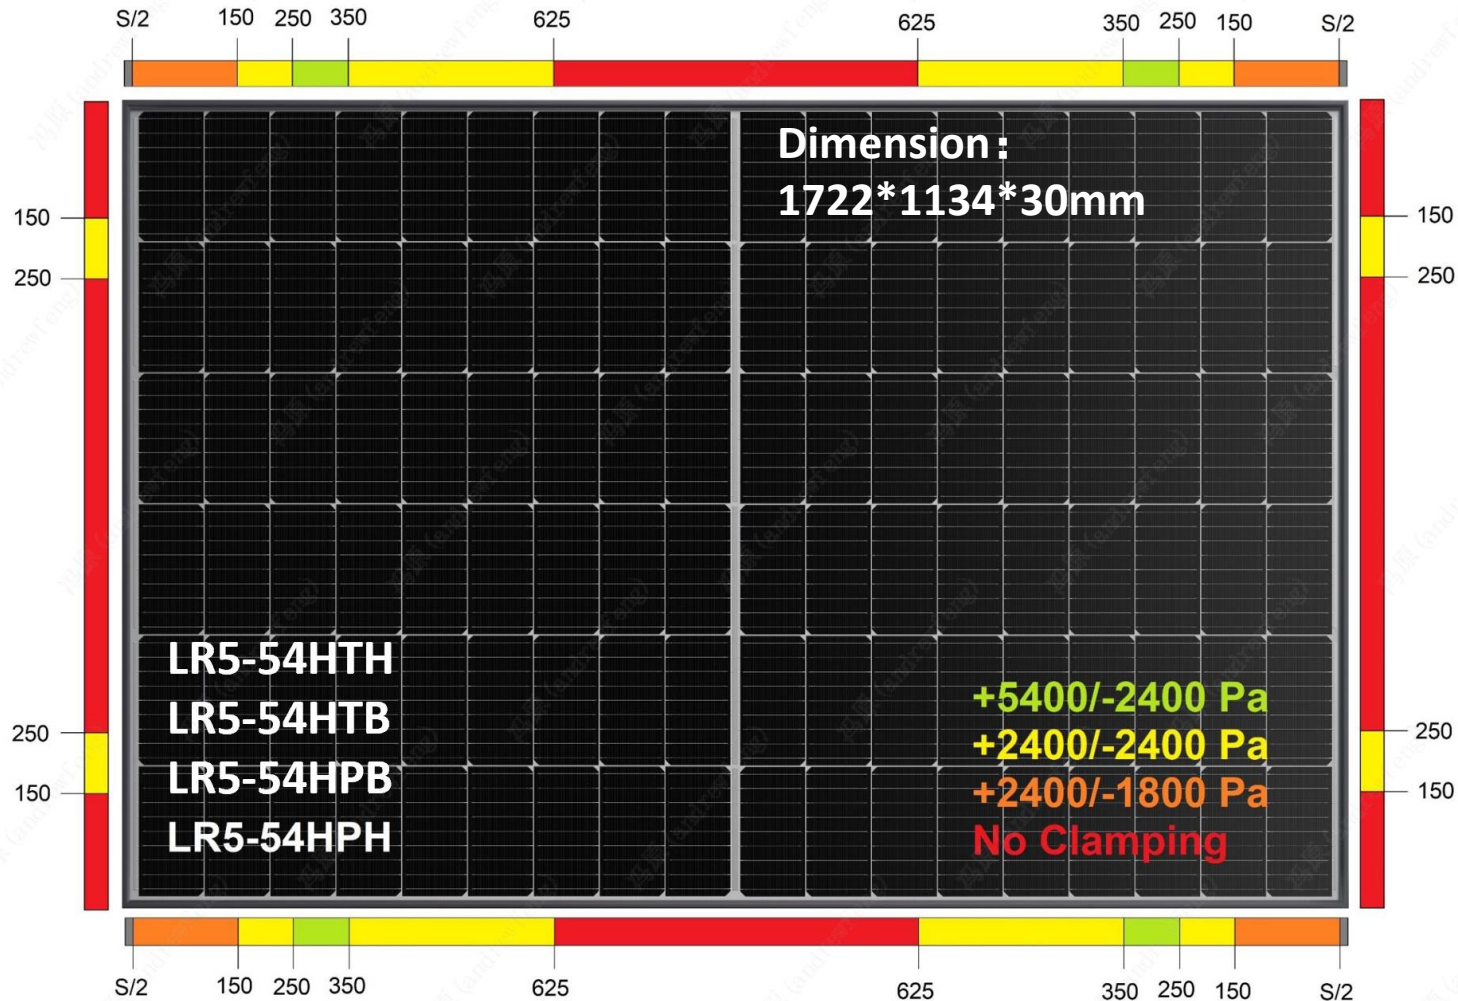


Note:

- “S” is the width of the clamp and it shall be no less than 40mm
- Figures indicate the distance between the center of clamp to the end of frame
- Please feel free to contact us if
 - Clamp width is less than 40mm
 - Your installation requires special clamping zone, or more rails
 - Other special installation method is needed

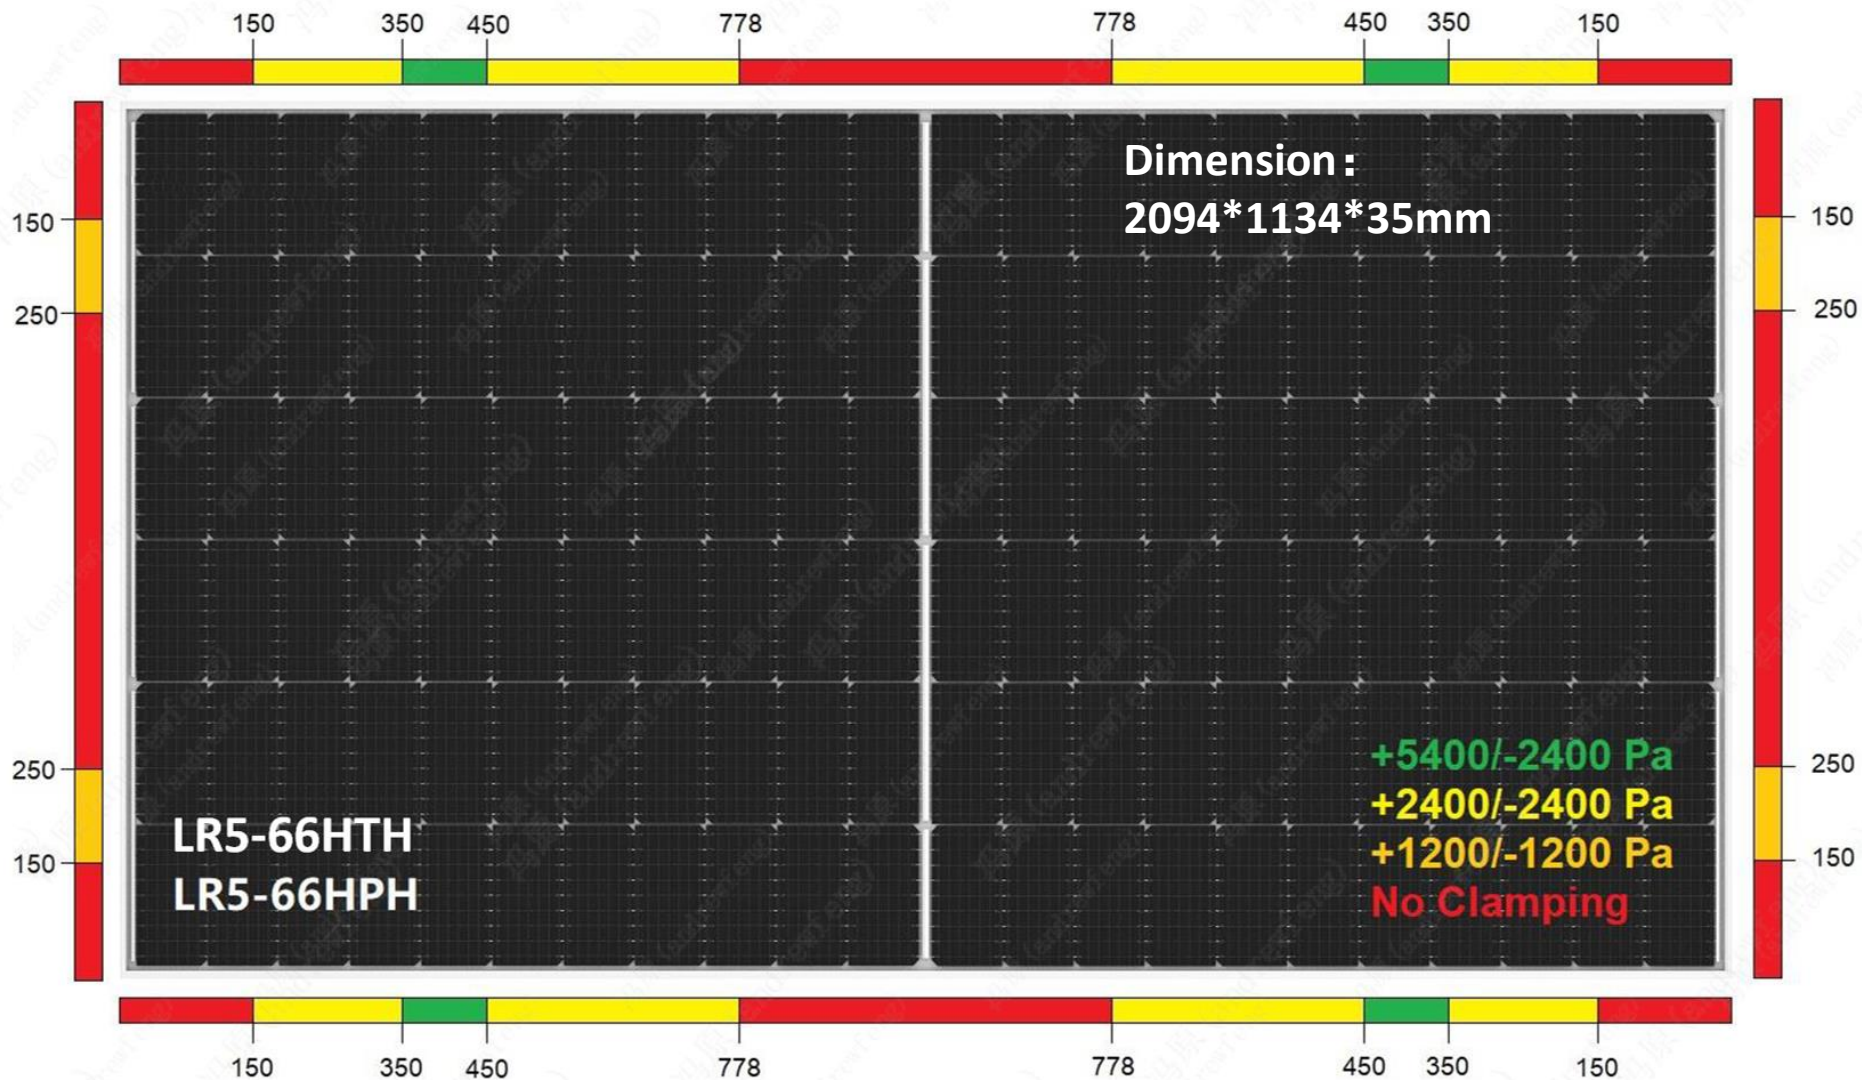

Note:

- "S" is the width of the clamp and it shall be no less than 40mm
- Figures indicate the distance between the center of clamp to the end of frame
- Please feel free to contact us if
 - Clamp width is less than 40mm
 - Your installation requires special clamping zone, or more rails
 - Other special installation method is needed

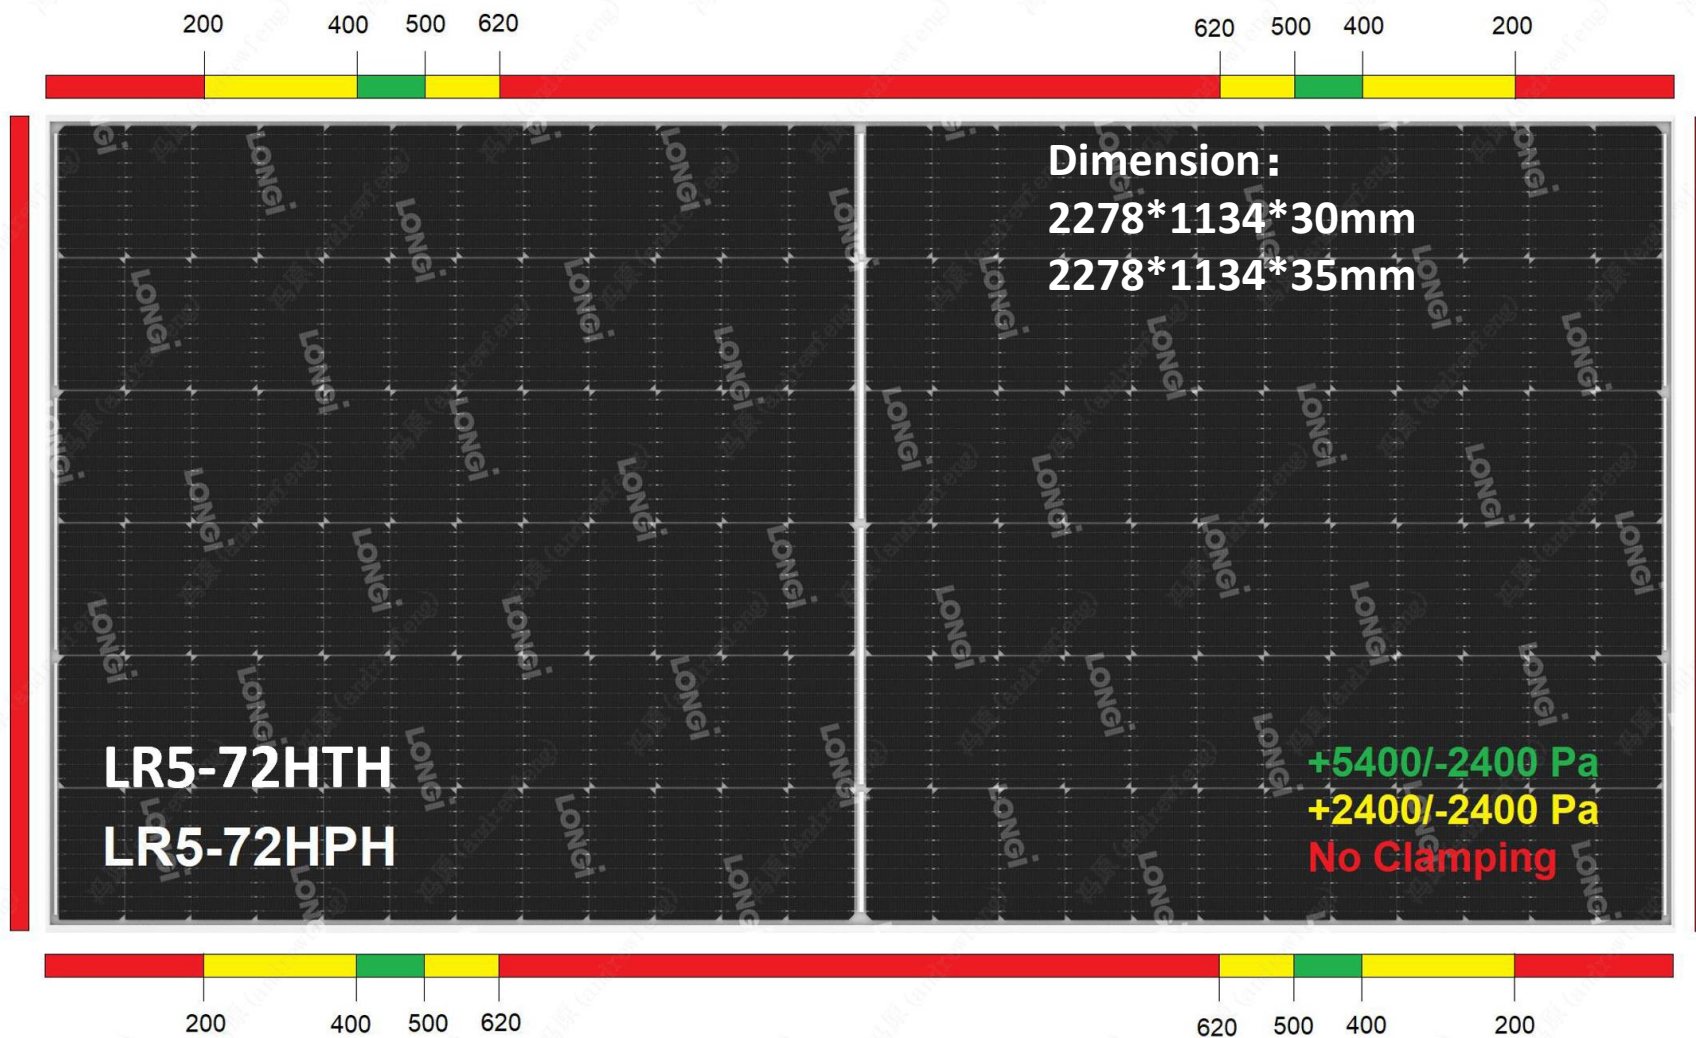


Note:

- "S" is the width of the clamp and it shall be no less than 40mm
- Figures indicate the distance between the center of clamp to the end of frame
- Please feel free to contact us if
 - Clamp width is less than 40mm
 - Your installation requires special clamping zone, or more rails
 - Other special installation method is needed




Hi-MO 4

Hi-MO X

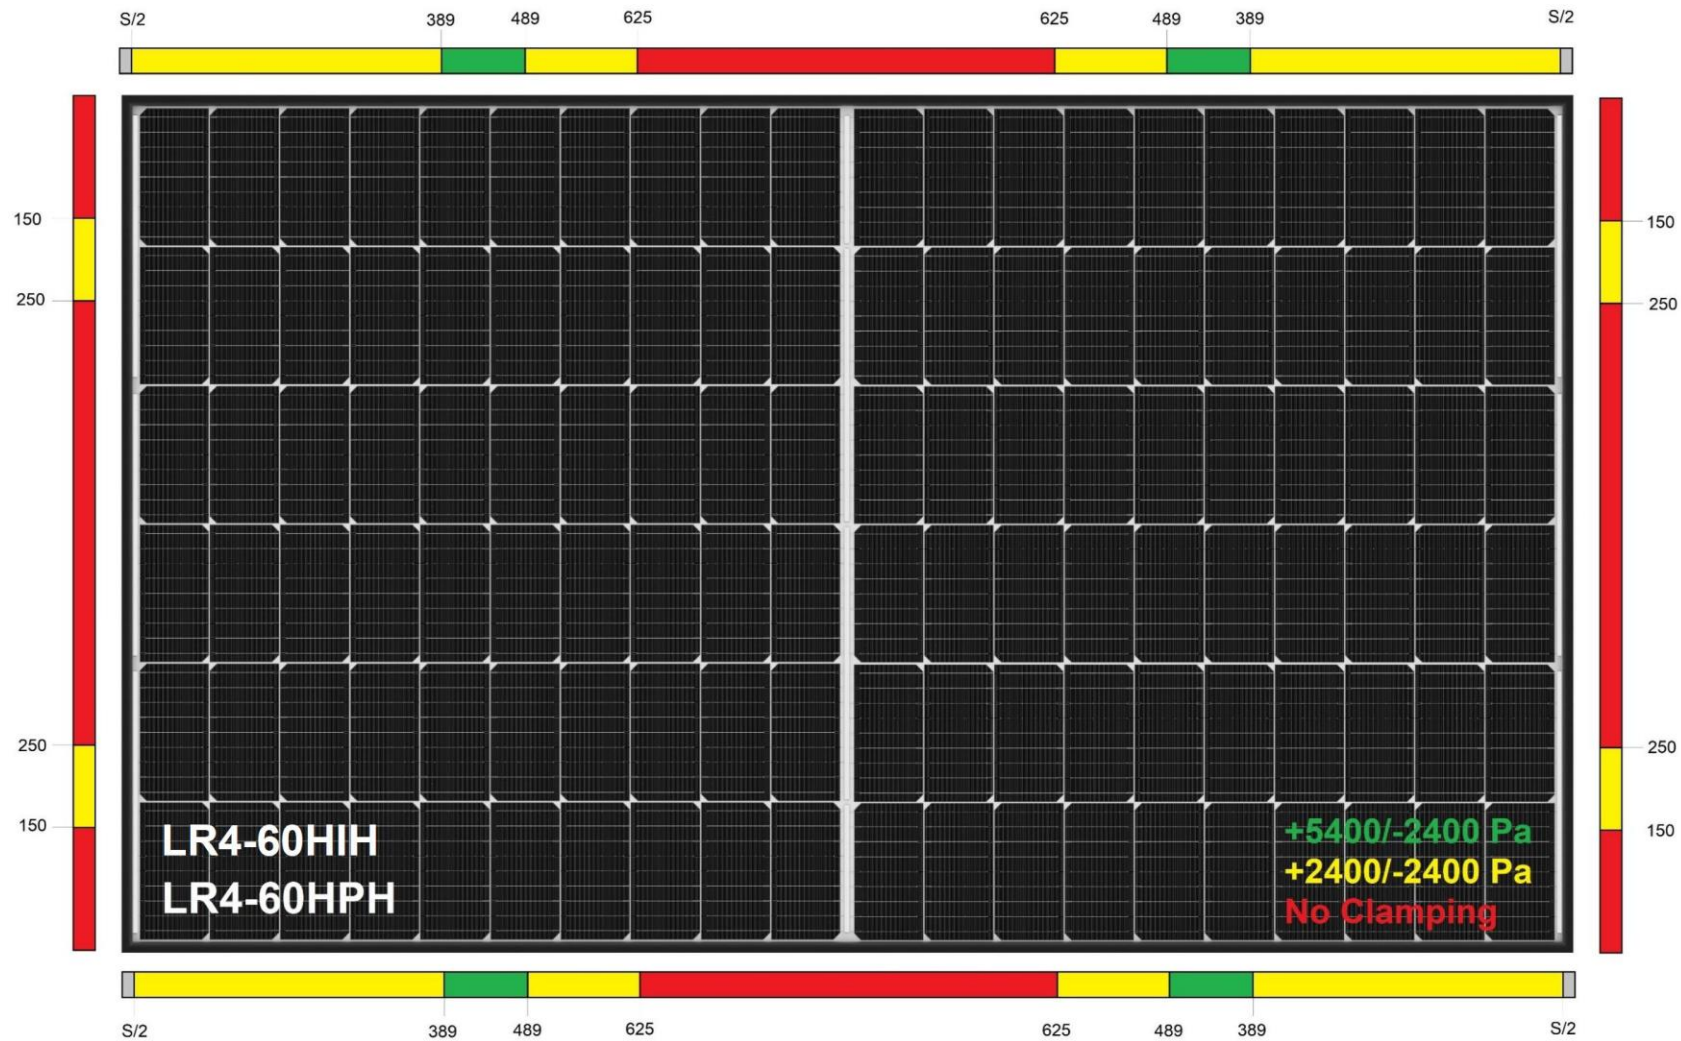


Note:

- “S” is the width of the clamp and it shall be no less than 40mm
- Figures indicate the distance between the center of clamp to the end of frame
- Please feel free to contact us if
 - Clamp width is less than 40mm
 - Your installation requires special clamping zone, or more rails
 - Other special installation method is needed

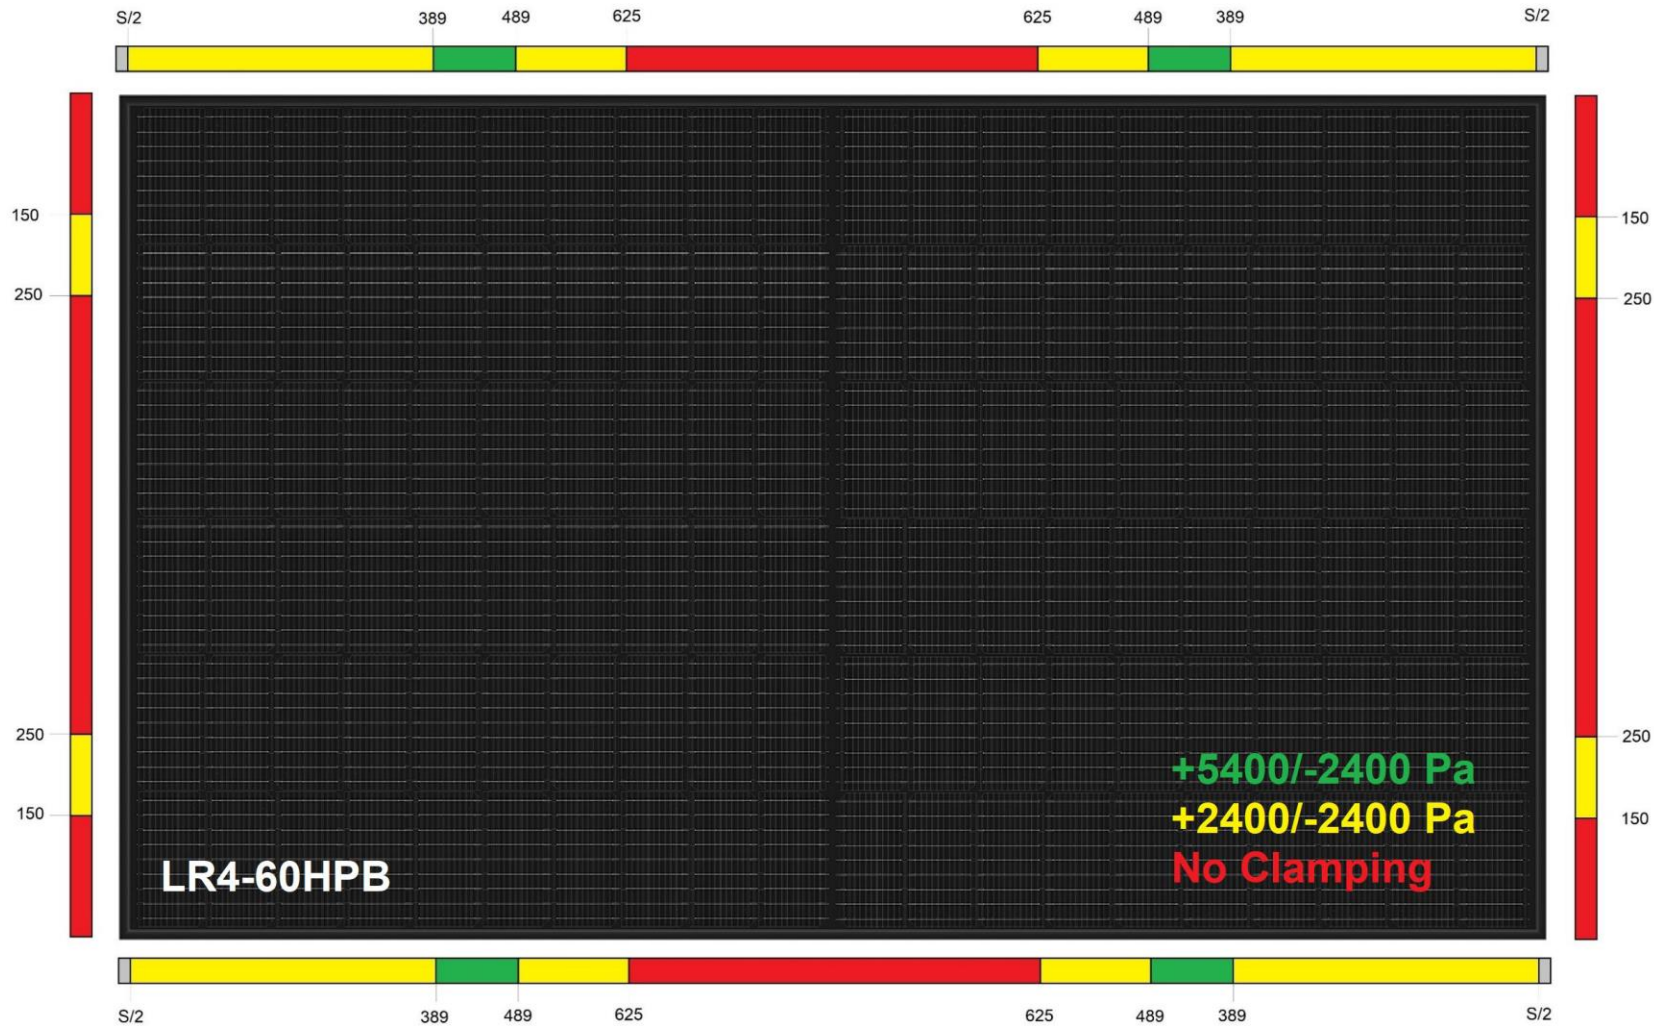

Note:

- “S” is the width of the clamp and it shall be no less than 40mm
- Figures indicate the distance between the center of clamp to the end of frame
- Please feel free to contact us if
 - Clamp width is less than 40mm
 - Your installation requires special clamping zone, or more rails
 - Other special installation method is needed

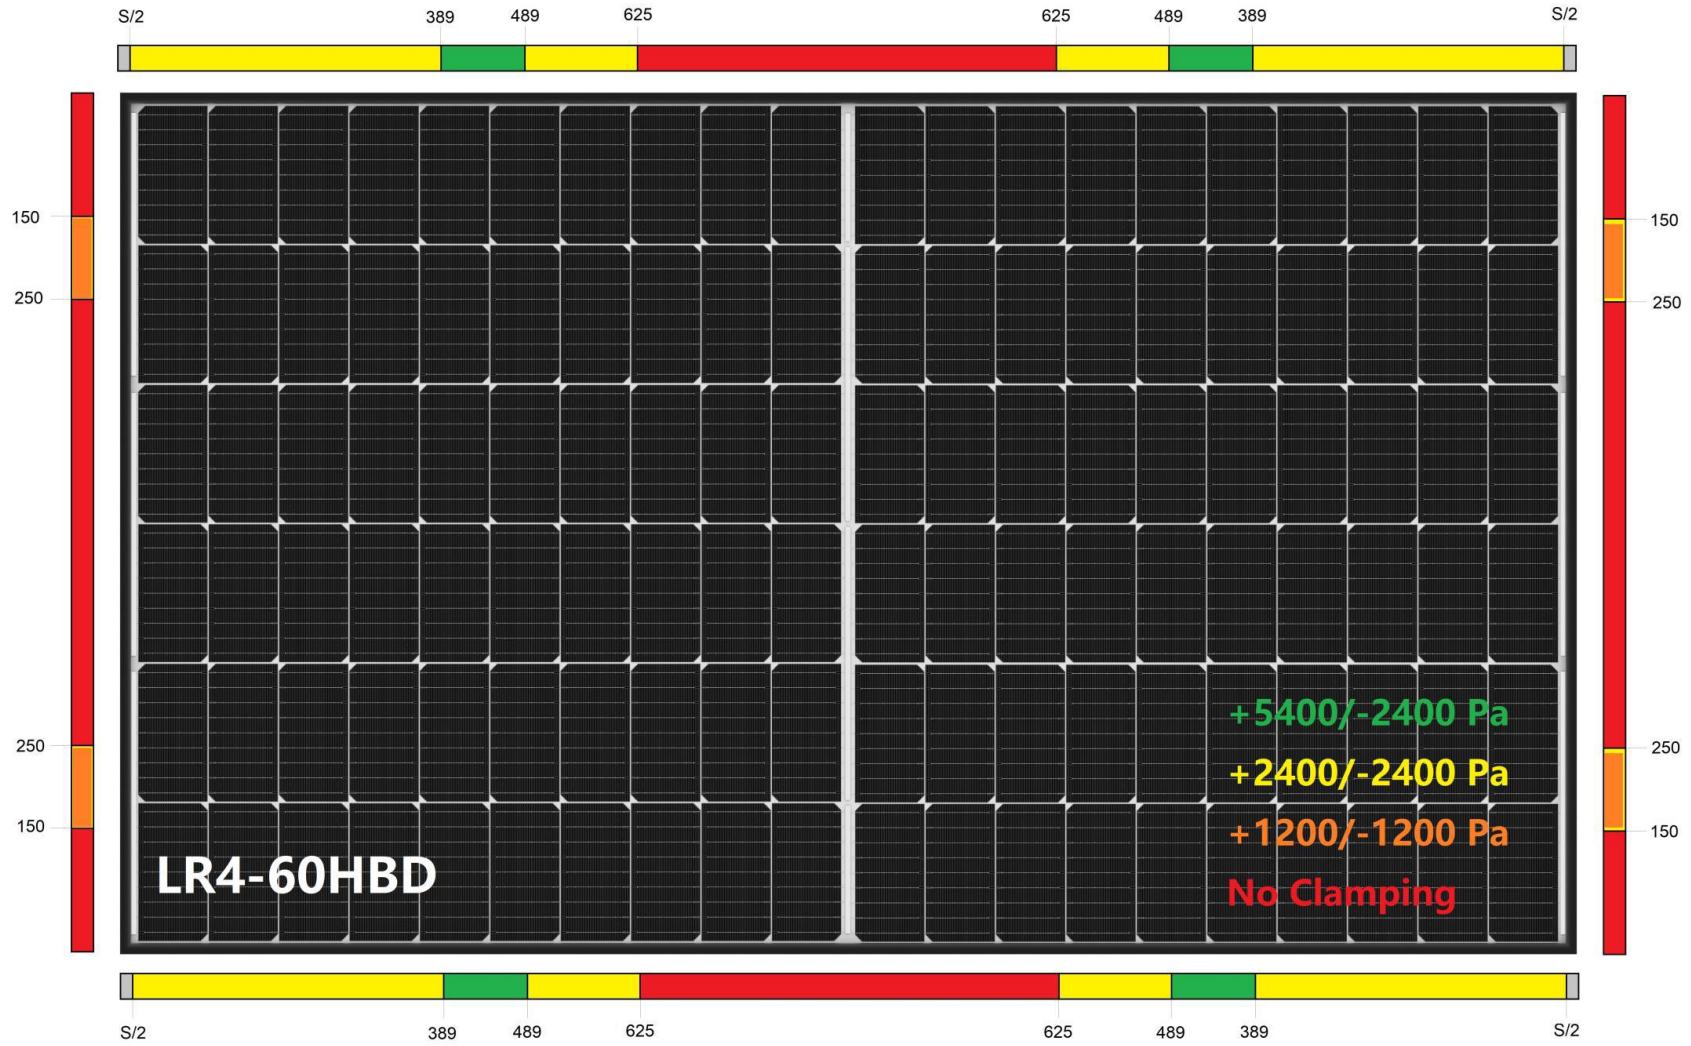


Note:

- “S” is the width of the clamp and it shall be no less than 40mm
- Figures indicate the distance between the center of clamp to the end of frame
- Please feel free to contact us if

Clamp width is less than 40mm

Your installation requires special clamping zone, or more rails

Other special installation method is needed

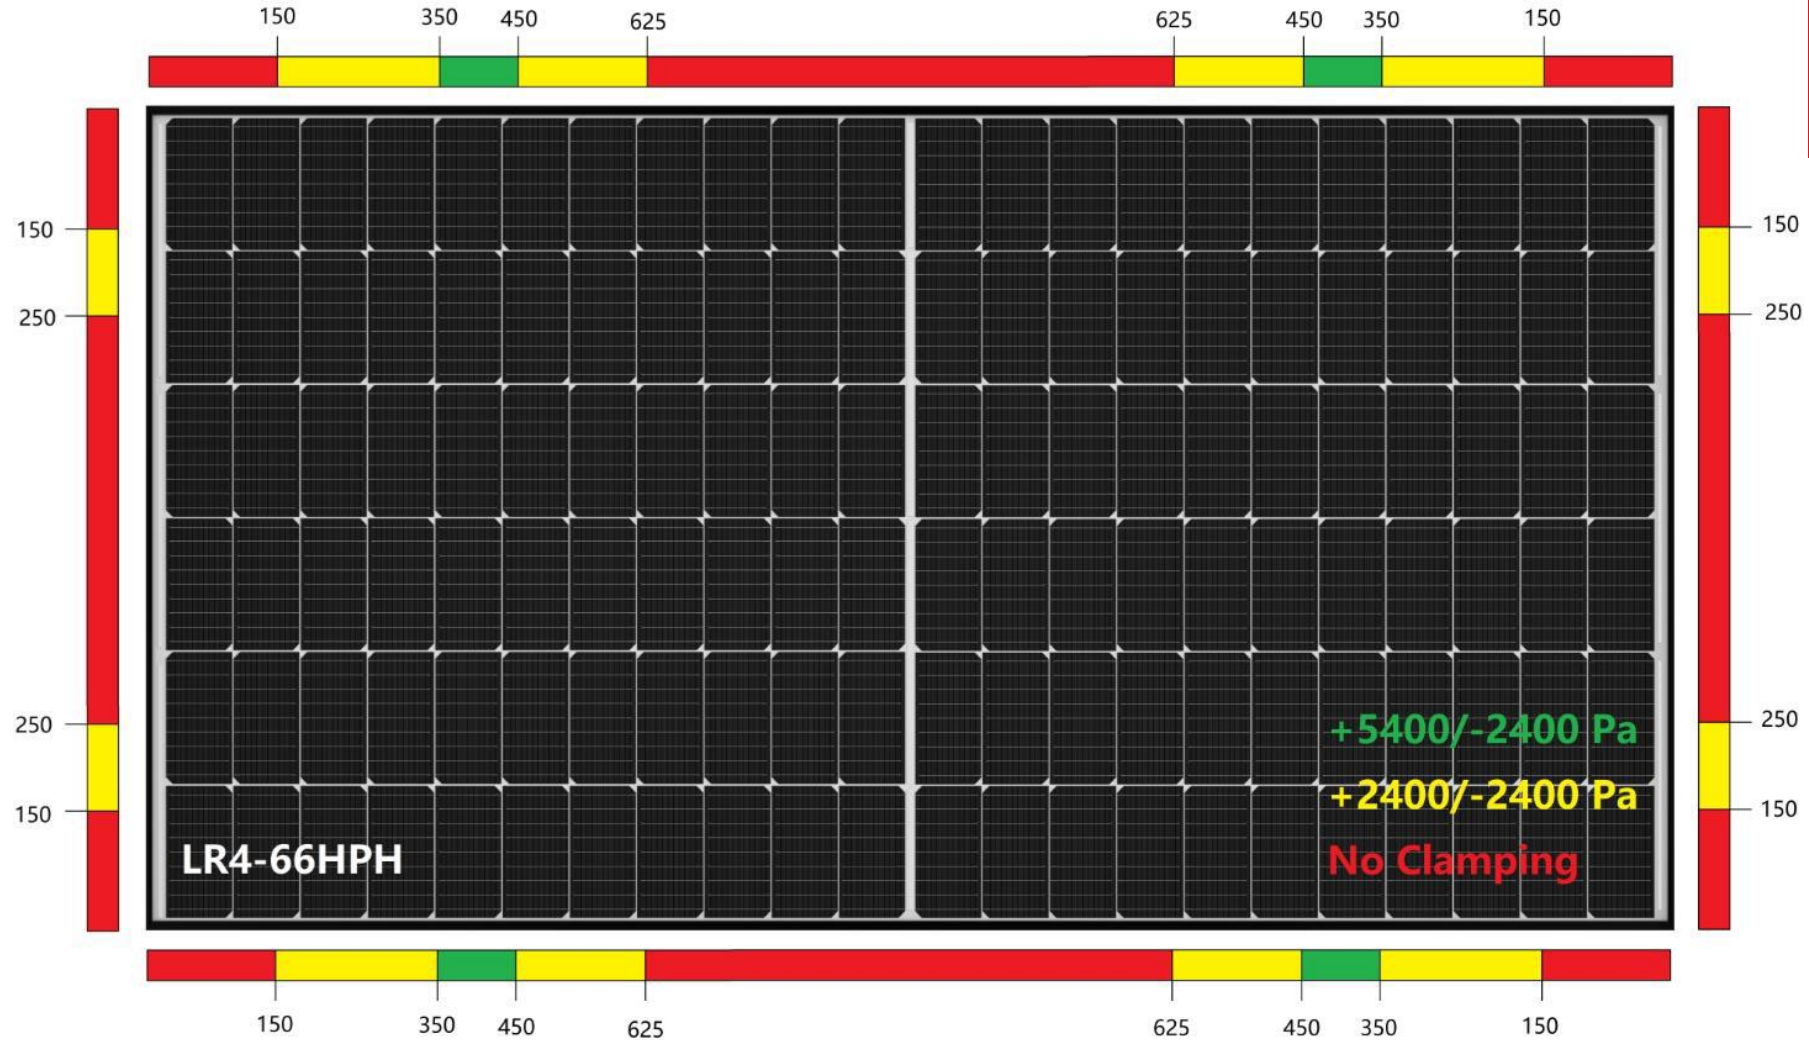


Note:

- "S" is the width of the clamp and it shall be no less than 40mm
- Figures indicate the distance between the center of clamp to the end of frame
- Please feel free to contact us if

Clamp width is less than 40mm


Your installation requires special clamping zone, or more rails

Other special installation method is needed

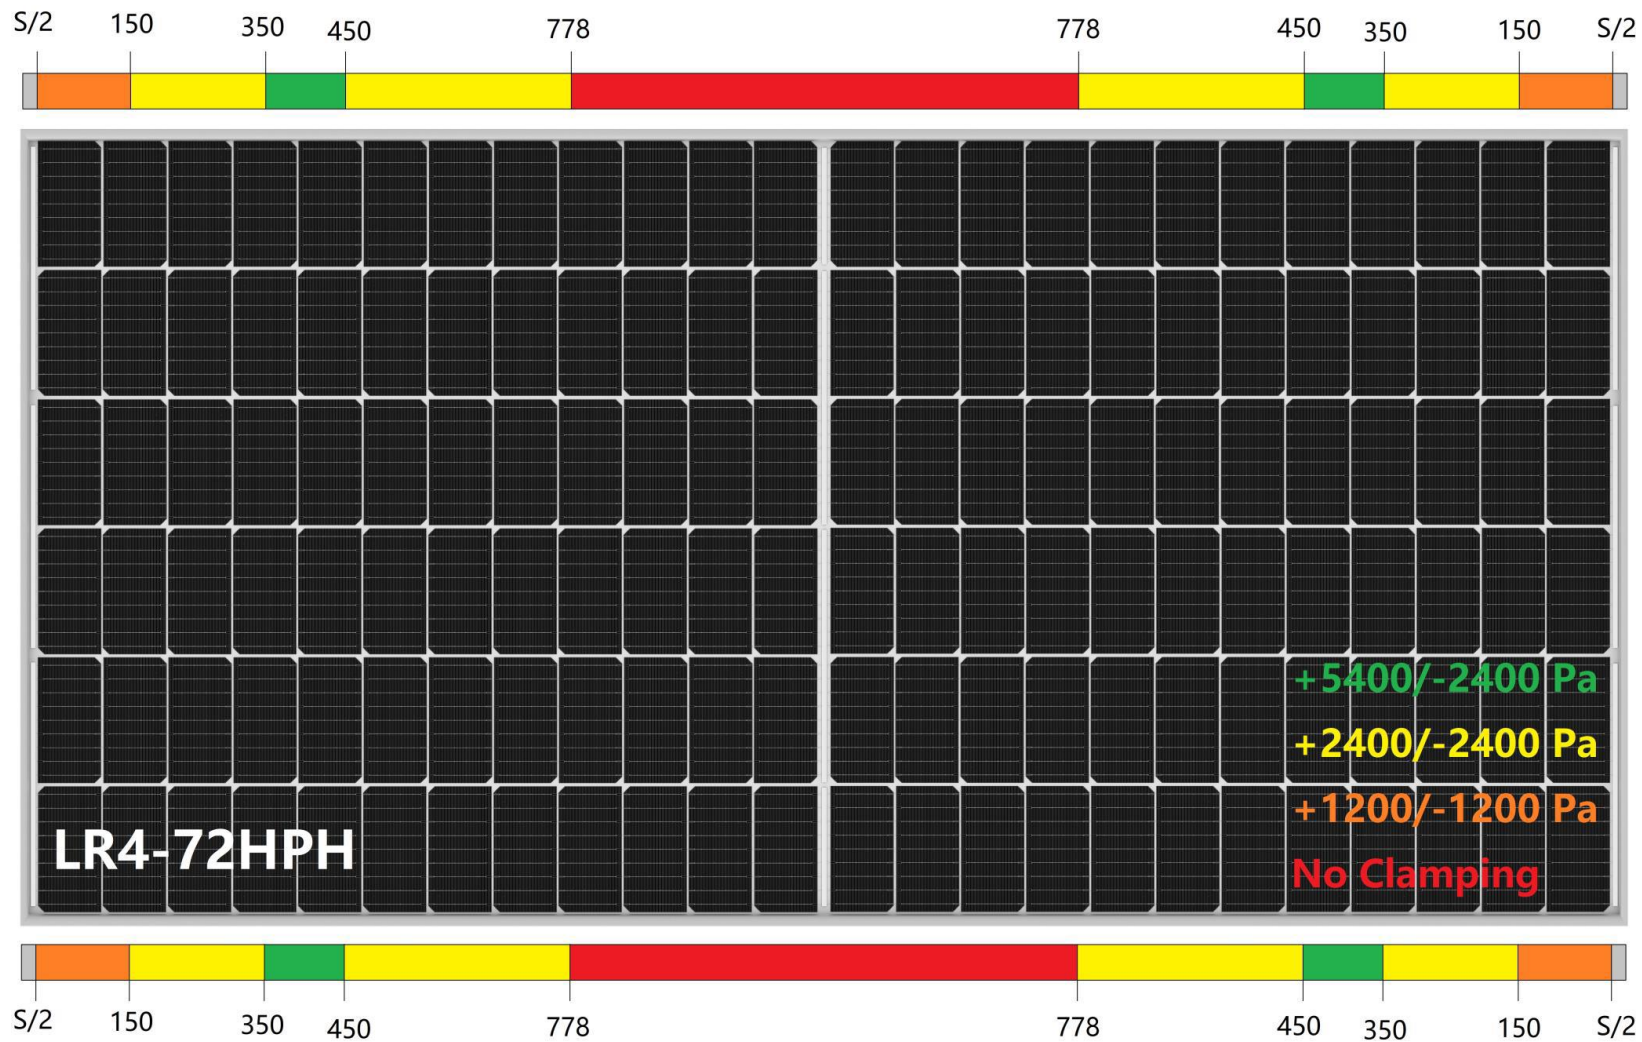

Note:

- “S” is the width of the clamp and it shall be no less than 40mm
- Figures indicate the distance between the center of clamp to the end of frame
- Please feel free to contact us if
 - Clamp width is less than 40mm
 - Your installation requires special clamping zone, or more rails
 - Other special installation method is needed

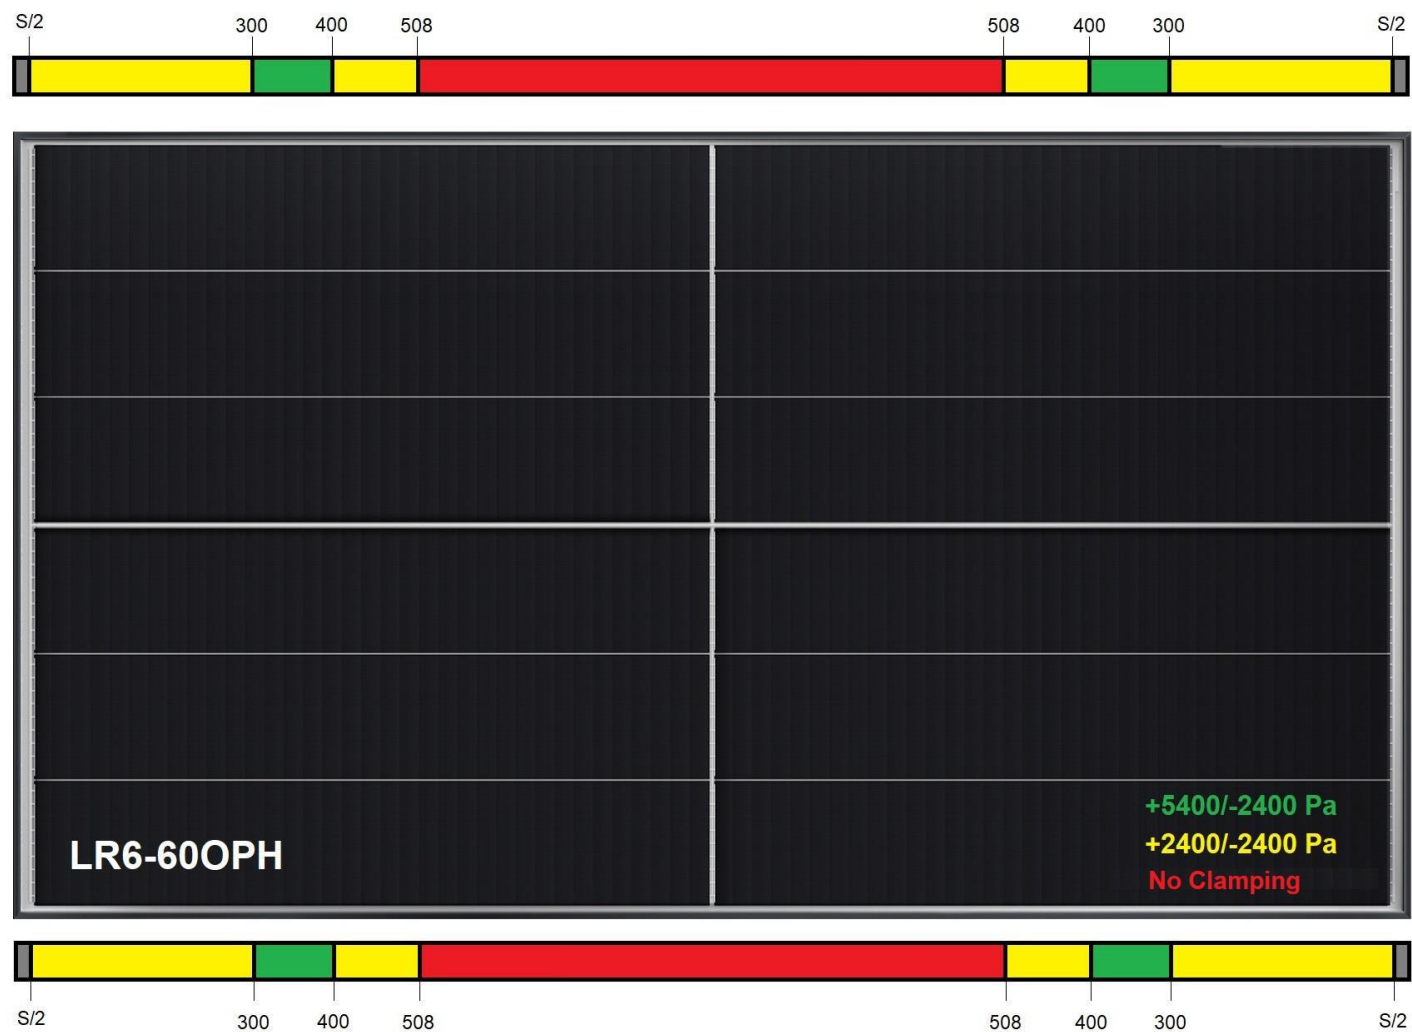

Note:

- “S” is the width of the clamp and it shall be no less than 40mm
- Figures indicate the distance between the center of clamp to the end of frame
- Please feel free to contact us if
 - Clamp width is less than 40mm
 - Your installation requires special clamping zone, or more rails
 - Other special installation method is needed